


AREA ABOVE THIS LINE FOR CUSTOMER  
CONDUITS TO POWER PANEL.

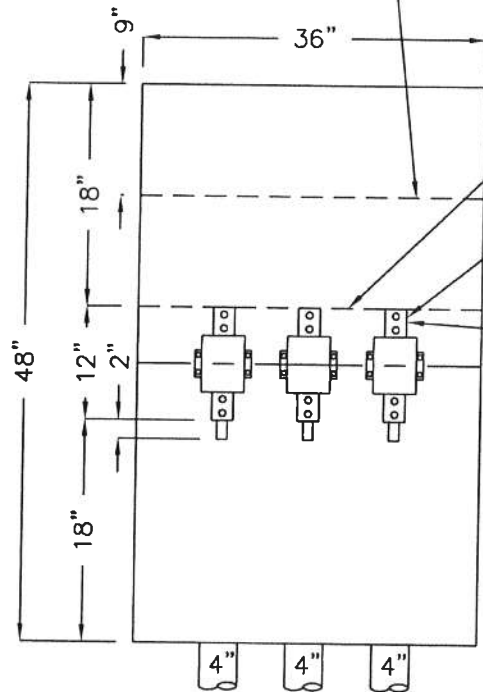

ELEVATION

CT CABINET

MAINTAIN MINIMUM OF 3'  
WORK AREA IN FRONT OF  
C.T. CABINET.

PLAN

AREA ABOVE THIS LINE FOR ROUTING  
OF CUSTOMER CABLE.

CUSTOMER TO TRAIL CABLES TO  
MINIMIZE TENSION ON CURRENT  
TRANSFORMER.

CUSTOMER CONNECTIONS, TYPICAL.

CABINET TO BE GROUNDED  
TO THE NEUTRAL.


600 AMP SERVICE 2-4" SERVICE CONDUITS }  
800 AMP SERVICE 3-4" SERVICE CONDUITS } CONDUITS FOR INCOMING LINE MUST ENTER  
THROUGH THE BOTTOM UNLESS WRITTEN  
PERMISSION IS OBTAINED FROM THE  
EASTON UTILITIES COMMISSION.

ALL BOXES TO BE MINIMUM OF 16-GAUGE STEEL, NEMA 1 FOR INDOOR OR  
NEMA 3R FOR OUTDOOR, 12" MINIMUM DEPTH, BOLT ON DOOR, POSITIVE LATCH  
WITH PADLOCK EYE. GROUNDED MOUNTING - ADJUSTABLE ASSEMBLY OF VERTICAL  
AND HORIZONTAL BARS.

CURRENT TRANSFORMER CABINET :

INDOOR - CABINET FURNISHED BY EUC AND INSTALLED BY OWNER.

OUTDOOR - CABINET FURNISHED AND INSTALLED BY OWNER.

APPROVAL	REVISED	TOWN OF EASTON AND EASTON UTILITIES COMMISSION STANDARD DETAILS 3Ø CURRENT TRANSFORMER CABINET
 EU MANAGER OF ENGINEERING DATE		
ISSUED		STANDARD No. E-3.00